



STRETCH PVC Ceilings
S-R-...-....

STR-ETCH

Technical specifications

Colour	24 Standard colours
Surface finish	Supermirror (high gloss) Satin (satin matt) Matt (formerly stellar)
Fire retardance level	B-s1, d0 in acc. with DIN EN 14716
Special types	BIO-PRUF™ treated film Micro-perforated acoustic film
Film thickness	170 µm
Film width	Up to 300 cm
Cores	Steel, internal diameter 76 mm
Packaging	Individual boxes on non-returnable wooden pallet
Minimum order quantity	100 m (1 roll)
Heavy metals	Free of heavy metals in acc. with RoHS
Roll length and winding	Satin / Matt: 100 m, face side on inside Supermirror: 2 x 50 m, kiss-laminated


Perforation:

The small perforations of 0.3 mm diameter in stretched condition are hardly visible to the human eye. This allows the creation of ceilings with the desired acoustic properties without compromising the aesthetics. The acoustic ceiling film is available in any desired colour in the three surface finishes; Supermirror, Satin and Matt (Stellar), including a translucent version for light ceilings.

- **Perforation density:**
250,000 perforations/m²

- **Standard perforation size**
0,30mm. Perforations of
0,15mm or 0,45mm
available on request

- **Perforation layout:**

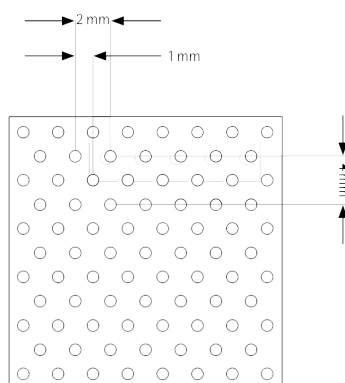

Warranty

- The warranty period is 10 (ten) years

This warranty applies only to the original product of the STRETCH trademark, purchased from STRETCH BV or an authorised dealer. The manufacturer guarantees the preservation of strength of the material and the welds, as well as the preservation of color of the material during the warranty period. The warranty is valid if there is a Warranty Certificate indicating the unique identification number of the product ID, the dealer, and the date of installation. For installation works, the warranty is provided by the installation company based on the locally applicable legislation.